

Star Shower™ Laser Light



Shower Your Home with Thousands of Laser Lights in Seconds!

IMPORTANT!

Star Shower™ ONLY WORKS IN THE DARK!

To save electricity, Star Shower has been designed to only turn on in the dark.

TEST THE UNIT IN A DARK ROOM.

Star Shower™ Laser Light

Instructions for Use:

- Remove all Star Shower components from packaging, saving packaging to store Star Shower safely when not in use.
- Determine a location for Star Shower that is free from visual obstructions between Star Shower and your intended surface so the laser lights project clearly.


Distance to Surface

Coverage

10 feet	206 sq ft.
20 feet	824 sq ft.
25 feet	1288 sq ft.
30 feet	1854 sq ft.
35 feet	2524 sq ft.
40 feet	3296 sq ft.

- Locate the pointer on top of the stake (Fig. 1). Ensure that the pointer on the stake points directly at your intended surface (Fig. 2). Insert stake into the ground in the location intended for Star Shower until angled portion of stake is completely underground.

If you have difficulty inserting stake into the ground, a rubber mallet may be used to gently pound in the stake. Never attempt to push or pound the housing of Star Shower.

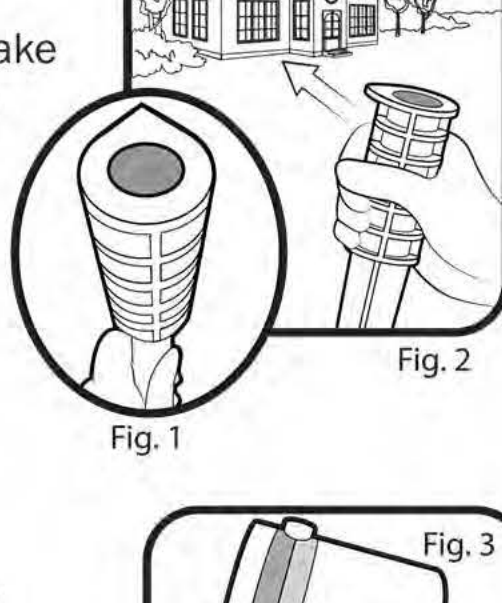


- Screw the housing of the Star Shower onto the stake clockwise (Fig. 3).



- Loosen the thumbscrew and adjust the angle of the Star Shower housing so it is pointing at your intended surface. Tighten the thumbscrew (Fig. 4).




- Attach an extension cord rated for outdoor use (not included) to the electrical plug on the Star Shower. Plug the extension cord into an outdoor electrical outlet.

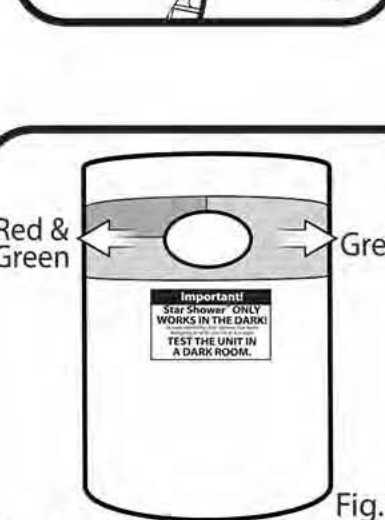

- Switch the Star Shower on. Star Shower includes a light sensor to save electricity so **it will only turn on in the dark.**

Pressing the switch towards the green stripe will emit only green laser lights. Pressing the switch towards the green and red stripe will emit both red and green lights. Leaving the switch centered will turn Star Shower off (Fig. 5).

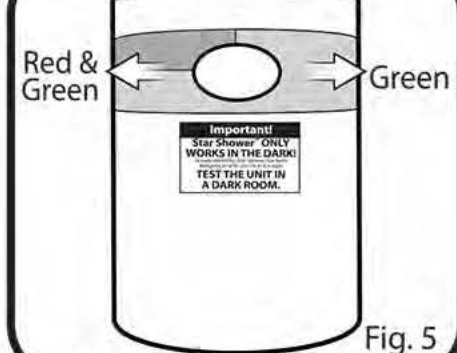

Helpful Hints:

- Star Shower lights will appear brightest in the dark and may look dimmer if there are competing sources of light.
- Star Shower is intended to operate in temperatures from -30 °F to 100 °F (-35 °C to 40 °C). At or below freezing temperature, Star Shower may take up to 10 minutes to warm up and reach its full projection strength.

LIMITATION OF LIABILITY

Liability limited to the purchase price of this product. Telebrands Corp. shall not be liable for any incidental or consequential damages or any implied warranty on this product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Manufactured for
TEL Brands

Fairfield, NJ 07004

©2015 Telebrands

www.telebrands.com

Made in China.

Please read all instructions prior to use and save instructions for reference.




CAUTION:

Do not use Star Shower in any manner other than that intended by manufacturer to avoid exposure to hazardous laser radiation.

Do not intentionally shine into eyes or face.

Do not attempt to open the housing of Star Shower under any circumstance.

Please observe warning labels on product:

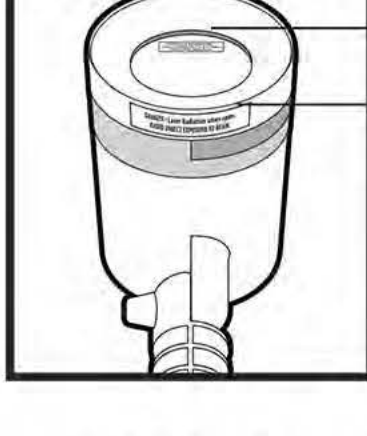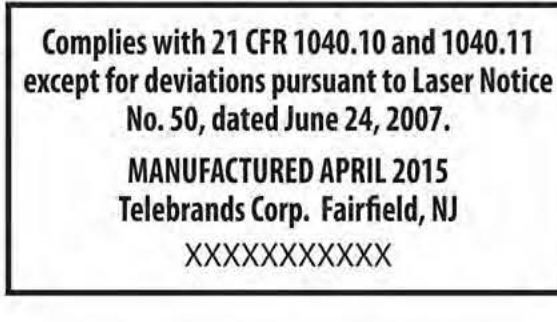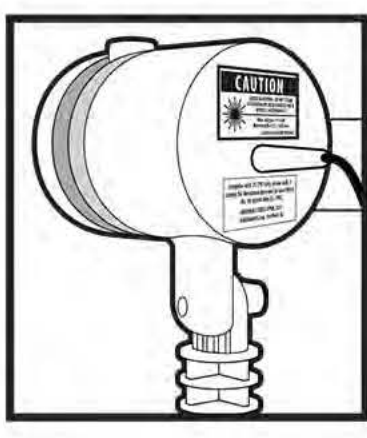

AVOID EXPOSURE -
Laser radiation is emitted from this aperture

DANGER - Laser Radiation when open.
AVOID DIRECT EXPOSURE TO BEAM.

NOTICE: Lasers should not be projected at or within the flight path of an aircraft within 10 nautical miles of an airport. If your intended surface is within 10 nautical miles of an airport, lower the angle of the Star Shower so that no lasers point into the sky.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

Model: 15701-AC/DC
Input: 100-240VAC, 50/60Hz, 0.2A
Output: 5VDC, 2A

IMPORTANT SAFETY INSTRUCTIONS

When using electrical products, basic precautions should always be practiced including the following:

- Read and follow all safety instructions.
- Read and follow all instructions that are on the product or provided with the product.
- Reference the National Electric Code, ANSI/NFPA 70, specifically for the installation of wiring and clearances from power and lighting conductors.
- Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
- For a direct plug-in power unit, do not install or use within 10 feet of a pool.
- For a direct plug-in unit, do not use in a bathroom.
- WARNING:** Risk of Electric Shock. When used outdoors, install only to a covered Class A GFCI protected receptacle. If one is not provided, contact a qualified electrician for proper installation. Ensure that the power unit and cord do not interfere with completely closing the receptacle cover.
- WARNING:** Risk of Fire. Installation involves special wiring methods to run wiring through a building structure. Consult a qualified electrician.
- WARNING:** Do not use with receptacles that are weatherproof only when the receptacle is covered (attachment plug cap not inserted and receptacle cover closed).
- This unit is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the unit.
- Don't operate unit with damaged plug.
- Don't disassemble charger. Disassembly may result in a risk of electric shock or fire.
- To reduce the risk of electric shock, unplug the charger from the outlet when not in use.
- Don't operate unit if it has been subjected to damage in any way.

SAVE THESE INSTRUCTIONS - This manual contains important safety and operating instructions for power units.